

49" Full-HD LCD Monitor



ProductFeatures

- Industrial level DID LCD panel, suitable for extensive 7*24 continuous works.
- High fidelity digital processing, brilliant and vivid video.
- Built-in 3D COMB filter and 3D Noise Reduction
- Abundant interfaces HDMI, DVI, VGA, BNC, support video loop
- Infrared, RS232 double mode, supporting remote PC control
- Brightness smart detection, power-saving
- Using Tamper-proof metal housing, no radiation
- Professional thermal design to extend equipment lifespan
- Built-in power, low energy consumption, ultra-quiet
- Fast stack installation, professional project design, supporting arc-shaped mounting

Technical Specifications

Model	DHL49	
System		
Diagonal	49"(16:9)	
Resolution	1920×1080 (FHD)	
Backlight	LED	
Brightness/Luminance (Standard)	450 cd/m ²	
Contrast	1100:1	
Angle of view	178° /178° (vertical/horizontal)	
Response time	5.8ms	
Signals		
Input	standard	VGA(D-Sub)×1、CVBS(BNC)×2、DVI-D×1、HDMI×1、RS232×1、USB×1

Dahua Technology Co., Ltd.


1199BinAn Road, Binjiang District, Hangzhou, China
 Fax: +86-571-87688815 Email:overseas@dahuatech.com

Tel: +86-571-87688883
 www.dahuasecurity.com

	optional	audio×1、RJ45×1、HDCVI×1、SDI×1、DP×1
Output	Standard	CVBS(BNC)×2、RS232×1
	optional	audio×1、DP×1
General		
Consumption (Standard)	60W	
Consumption (Standby)	≤1W	
Power Supply	AC100~240V (+/-10%),50/60 Hz	
Gross Weight	15kg	
Monitor dimensions	1127.1×667.3×52.9mm	
Work Environment	Temperature: 0℃~50℃	
	Humidity: 20%~90%	
Accessory		
Standard	VGA cable, power cable	
Optional	Pedestal, hanging bracket	

*Design and specifications are subject to change without notice.

Dimensions

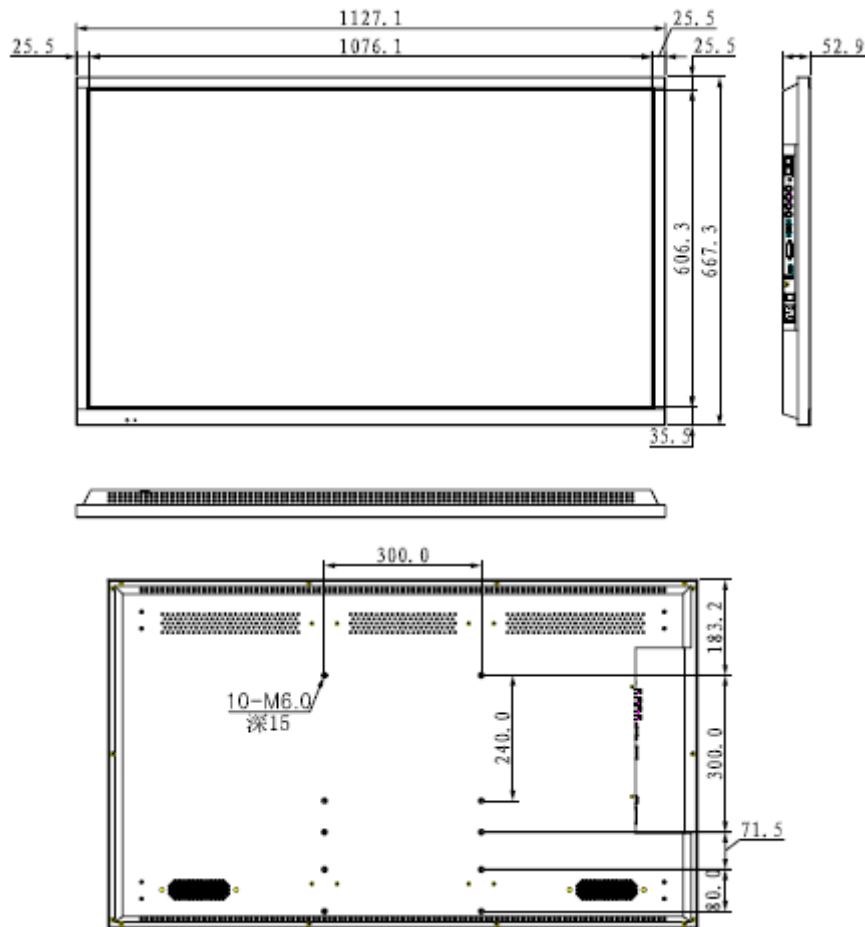

Dahua Technology Co., Ltd.

1199BinAn Road, Binjiang District, Hangzhou, China
 Fax: +86-571-87688815 Email:overseas@dahuatech.com

Tel: +86-571-87688883
 www.dahuasecurity.com