

ITC217-PW1B-IRLZ10

2MP Full HD WDR Network IR Access ANPR Camera



Features

- > High-performance 2 Mega CMOS Sensor
- > HD Image Resolution 1920(H)*1080(V)
- > Motorized lens 4.7-47mm, IR distance to 40m
- > Support plate Recognition (license plate and color)
- > Support two way vehicle snapshot (loop and video)
- > Support to embedded with white list inside the camera to control the barrier.
- > Support PoE, IP67



ITC217-PW1B-IRLZ10


Technical Specifications

Model	ITC217-PW1B-IRLZ10
Camera	
Image Sensor	1/2.7" 2Megapixel progressive scan CMOS
Effective Pixels	1920(H) x 1080(V)
Electronic Shutter Speed	Auto/Manual, 1/3(4)~1/10000s
Min. Illumination	0.01Lux/F1.4(Color); 0Lux/F1.4(IR on)
Camera Features	
Max. IR LEDs Length	40m for license plate
Day/Night	Auto(ICR) / Color / B/W
Backlight Compensation	BLC / HLC /WDR(120dB)
White Balance	Auto/Manual
Gain Control	Auto/Manual
Lens	
Focal Length	4.7mm~47mm
Focus Control	Motorized
Video	
Compression	H.264/H.264H/H.264B/MJPEG
Resolution	1080P(1920x1080)/1.3M(1280×960)/720P(1280×720)/D1(704×576
	/704×480)/CIF(352×288/352×240)
Frame Rate Main Stream	1080P/720P(1 ~ 25/30fps)
Audio	
Compression	G.711a/ G.711u/ AAC
Interface	1/1 channel In/Out
Smart Function	
Traffic Event	Video detection
	Loop detection
	License plate recognition
	White list embedded, 10000 records, control the barrier opened.
Network	
Ethernet	RJ-45 (10/100Base-T)
API	ONVIF, CGI
Auxiliary Interface	
Memory Slot	Micro SD, Max 128GB
Alarm	2/1 channel In/Out
General	
Power Supply	DC12V, PoE (802.3af)
Power Consumption	<13W (with IR on, motorized lens working)
Working Environment	-30°C~+60°C, Less than 95% RH
Ingress Protection	IP67



ITC217-PW1B-IRLZ10

Dimensions (mm)

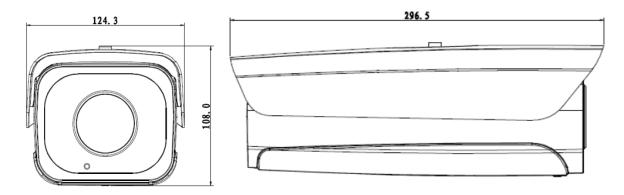

Dahua Technology Co., Ltd.

1199 BinAn Road, Binjiang District, Hangzhou, China

Tel: +86-571-87688883 Fax: +86-571-87688815

Email: overse as @dahuatech.com

www.dahuasecurity.com

*Design and specifications are subject to change without notice.

© 2015 Dahua Technology Co., Ltd.